

## TAPE AND REEL SPECIFICATIONS—SURFACE MOUNT

### Tape and Reel Packing

Tape and reel packing is available for all SO, TSOT (thin SOT-23), SOT-23 3L/4L, SOT-223, SSOP, TSSOP, QFN, DFN and DD packages in accordance with EIA Specification 481-B with the following exceptions: **(TSOT and SC70 pin 1 is placed into quadrant 2, and the largest axis of the component outline is parallel to the tape length as was established for the packages early. SOT-223 package tape width is 16mm).** Table 1 lists the applicable tape widths, dimensions and quantities for all LTC surface mount products. Consult a sales office for tape and reel

pricing and minimum order requirements. **Tape and reel packaging is ordered with a '#TRPBF' suffix for lead free finish parts or a '#TR' suffix for lead based finish parts.**

**\*Packages marked with an asterisk (\*) below are available in 500 unit reels through designated sales channels. 500 unit reels are ordered with a '#TRMPBF' or '#TRM' suffix.**

**\*\*Tape Widths marked with a double asterisk (\*\*) converted to 8mm width in July 2007.**

**Table 1. Tape and Reel Specifications**

LTC Package Code Designator	LTC Package Type	Number of Leads Offered	W Tape Width	P <sub>1</sub> Component Pitch	P <sub>0</sub> Hole Pitch	Reel Diameter	Units per Reel
DC*	DFN (2mm × 2mm)	3, 4, 6, 8	8/12mm**	4mm	4mm	180mm (7")	2,500*
DCB*	DFN (2mm × 3mm)	6, 8	8/12mm**	4mm	4mm	180mm (7")	2,500*
DD	DFN (3mm × 3mm)	8, 10, 12	12mm	8mm	4mm	330mm (13")	2,500
DDB*	DFN (3mm × 2mm)	8, 10, 12	8/12mm**	4mm	4mm	180mm (7")	2,500*
DE, UE	DFN (4mm × 3mm)	12, 14	12mm	8mm	4mm	330mm (13")	2,500
DF	DFN (4mm × 4mm)	12	12mm	8mm	4mm	330mm (13")	2,500
DH	DFN (5mm × 5mm)	16	12mm	8mm	4mm	330mm (13")	2,500
DHC	DFN (5mm × 3mm)	16	12mm	8mm	4mm	330mm (13")	2,500
DHD	DFN (5mm × 4mm)	16	12mm	8mm	4mm	330mm (13")	2,500
DJC	DFN (6mm × 3mm)	22	16mm	8mm	4mm	330mm (13")	2,500
DKD	DFN (7mm × 4mm)	12	12mm	8mm	4mm	330mm (13")	2,500
F	TSSOP (4.4mm)	14, 20	16mm	8mm	4mm	330mm (13")	2,500
FE	TSSOP (4.4mm)	16, 20	16mm	8mm	4mm	330mm (13")	2,500
FE	TSSOP (4.4mm)	28	16mm	12mm	4mm	330mm (13")	2,000
FW	TSSOP (6.1mm)	48, 56	24mm	12mm	4mm	330mm (13")	1,800
G	SSOP (5.3mm)	16	16mm	12mm	4mm	330mm (13")	2,000
G	SSOP (5.3mm)	20, 24	16mm	12mm	4mm	330mm (13")	1,800
G	SSOP (5.3mm)	28, 36	24mm	12mm	4mm	330mm (13")	2,000
GN	SSOP (0.150)	16	12mm	8mm	4mm	330mm (13")	2,500
GN	SSOP (0.150)	20, 24	16mm	8mm	4mm	330mm (13")	2,500
GW	SSOP (7.62mm)	36, 44	24mm	12mm	4mm	330mm (13")	1,000
KC	UTDFN (2mm × 2mm)	8	12mm	8mm	4mm	330mm (13")	2,500
KD	UTDFN (3mm × 3mm)	10	12mm	8mm	4mm	330mm (13")	2,500
KE	UTDFN (4mm × 3mm)	14	12mm	8mm	4mm	330mm (13")	2,500
M, Q, R	DD	3, 5 or 7	24mm	16mm	4mm	330mm (13")	750
MS8, MS8E	MSOP (0.118)	8	12mm	8mm	4mm	330mm (13")	2,500

# TAPE AND REEL


## TAPE AND REEL SPECIFICATIONS—SURFACE MOUNT

Table 1. Tape and Reel Specifications (cont)


LTC Package Code Designator	LTC Package Type	Number of Leads Offered	W Tape Width	P <sub>1</sub> Component Pitch	P <sub>0</sub> Hole Pitch	Reel Diameter	Units per Reel
MS10, MSE	MSOP (0.118)	10	12mm	8mm	4mm	330mm (13")	2,500
PD	UTQFN (3mm × 3mm)	16	12mm	8mm	4mm	330mm (13")	2,500
PDC	UTQFN (3mm × 4mm)	20	12mm	8mm	4mm	330mm (13")	2,500
PF	UTQFN (4mm × 4mm)	24, 28	12mm	8mm	4mm	330mm (13")	2,500
S8	SO (0.150)	8	12mm	8mm	4mm	330mm (13")	2,500
S	SO (0.150)	14	16mm	8mm	4mm	330mm (13")	2,500
S	SO (0.150)	16	16mm	8mm	4mm	330mm (13")	2,500
ST	SOT-223	3	16mm	12mm	4mm	330mm (13")	2,000
SW	SO (0.300)	16	16mm	12mm	4mm	330mm (13")	1,000
SW	SO (0.300)	18	24mm	12mm	4mm	330mm (13")	1,000
SW	SO (0.300)	20	24mm	12mm	4mm	330mm (13")	1,000
SW	SO (0.300)	24	24mm	12mm	4mm	330mm (13")	1,000
SW	SO (0.300)	28	24mm	12mm	4mm	330mm (13")	1,000
S3*	SOT-23	3	8mm	4mm	4mm	180mm (7")	2,500*
S5*	SOT-23, TSOT	5	8mm	4mm	4mm	180mm (7")	2,500*
S6*	SOT-23, TSOT	6	8mm	4mm	4mm	180mm (7")	2,500*
SC6*	SC70	6	8mm	4mm	4mm	180mm (7")	2,500*
SC8*	SC70	8	8mm	4mm	4mm	180mm (7")	2,500*
TS8*	TSOT	8	8mm	4mm	4mm	180mm (7")	2,500*
UD	QFN (3mm × 3mm)	16, 20	12mm	8mm	4mm	330mm (13")	2,500
UDC	QFN (3mm × 4mm)	20, 24	12mm	8mm	4mm	330mm (13")	2,500
UF	QFN (4mm × 4mm)	16, 20, 24, 28	12mm	8mm	4mm	330mm (13")	2,500
UFD	QFN (4mm × 5mm)	20, 24, 28	12mm	8mm	4mm	330mm (13")	2,500
UFE	QFN (4mm × 6mm)	38	12mm	8mm	4mm	330mm (13")	2,500
UFF	QFN (4mm × 7mm)	34	12mm	8mm	4mm	330mm (13")	2,500
UH	QFN (5mm × 5mm)	32	12mm	8mm	4mm	330mm (13")	2,500
UHE	QFN (5mm × 6mm)	36	12mm	8mm	4mm	330mm (13")	2,500
UHF	QFN (5mm × 7mm)	38	16mm	8mm	4mm	330mm (13")	2,500
UHG	QFN (5mm × 8mm)	52	12mm	8mm	4mm	330mm (13")	2,500
UHH	QFN (5mm × 9mm)	56	16mm	8mm	4mm	330mm (13")	2,500
UJ	QFN (6mm × 6mm)	40	16mm	12mm	4mm	330mm (13")	2,000
UK	QFN (7mm × 7mm)	48	16mm	12mm	4mm	330mm (13")	2,000
UKG	QFN (7mm × 8mm)	52	16mm	12mm	4mm	330mm (13")	2,000
UP	QFN (9mm × 9mm)	64	16mm	12mm	4mm	330mm (13")	2,000

**TAPE AND REEL SPECIFICATIONS—SURFACE MOUNT**

**Bending Radius**



**Embossed Carrier Dimensions (8mm, 12mm, 16mm, 24mm Tape Only)**

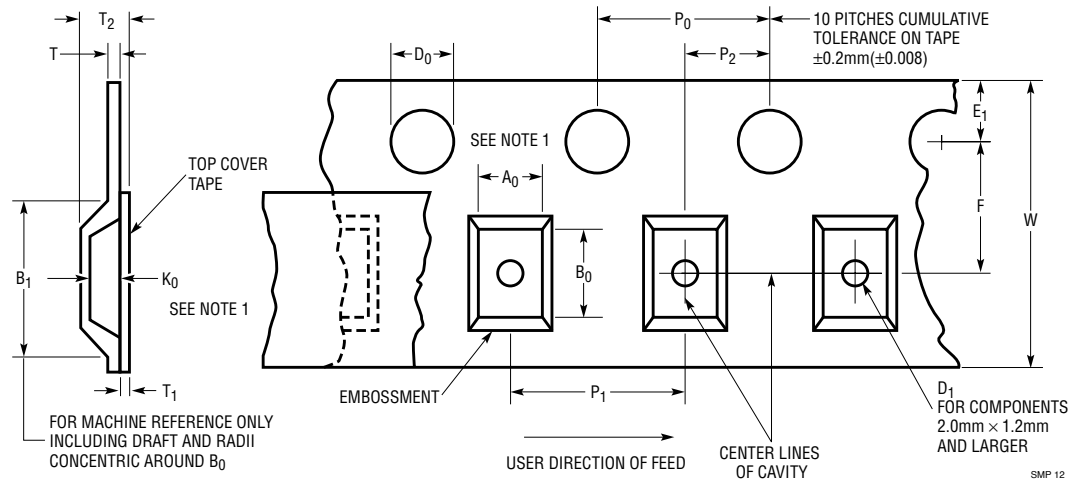

**Embossed Tape — Constant Dimensions**

Tape Size	D <sub>0</sub>	E <sub>1</sub>	P <sub>0</sub>	P <sub>2</sub>	T Max	T <sub>1</sub> Max	A <sub>0</sub> B <sub>0</sub> K <sub>0</sub>
8mm	1.5	+0.10	4.0 ± 0.10 (0.157 ± 0.004)	2.0 ± 0.05 (0.079 ± 0.002)	0.600 (0.024)	0.10 (0.004)	See Note 1
12mm		-0.0					
16mm	(0.059)	+0.004					
24mm		-0.0					

**Embossed Tape Variable Dimensions**

Tape Size	B <sub>1</sub> Max	D <sub>1</sub> Min	F	T <sub>2</sub> Max	R Min	W Max
8mm	4.35 (0.171)	1.0 (0.039)	3.5 ± 0.05	2.5 (0.098)	25 0.984	8.3
12mm (0.323)	8.2 (0.059)	1.5 (0.217 ± 0.002)	5.5 ± 0.05 (0.256)	6.5 (0.256)	30 (1.181)	12.3
16mm	12.1 (0.476)	1.5 (0.217 ± 0.002)	7.5 ± 0.10 (0.295 ± 0.004)	8.0 (0.315)	40 (1.575)	16.3
24mm	20.1 (0.791)	1.5 (0.217 ± 0.002)	11.5 ± 0.10 (0.453 ± 0.004)	12.0 (0.472)	50 (1.969)	24.3

**Note 1:** The cavity defined by A<sub>0</sub>, B<sub>0</sub> and K<sub>0</sub> shall surround the component with sufficient clearance that:


- a) the component does not protrude above the top surface of the carrier tape.
- b) the component can be removed from the cavity in a vertical direction without mechanical restriction after the top cover tape has been removed.

- c) rotation of the component is limited to 20° maximum for 8mm and 12mm tapes and 10° maximum for 16mm and 24mm tapes.
- d) lateral movement of the component is restricted to 0.5mm maximum for 8mm and 12mm wide tape and to 1.0mm maximum for 16mm and 24mm wide tape.


**Note 2:** The tape with or without components shall pass around R without damage.

## TAPE AND REEL SPECIFICATIONS—SURFACE MOUNT


### Component Rotation

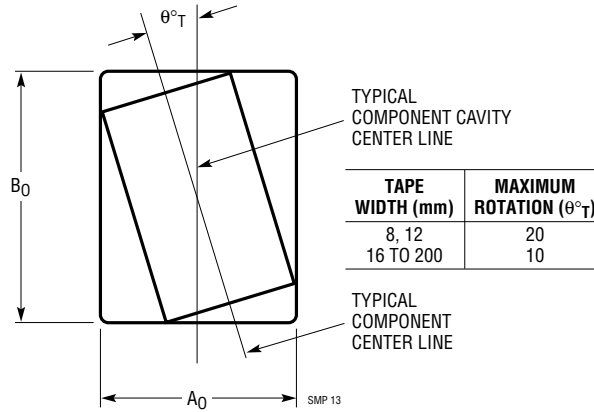

### Tape Camber (Top View)

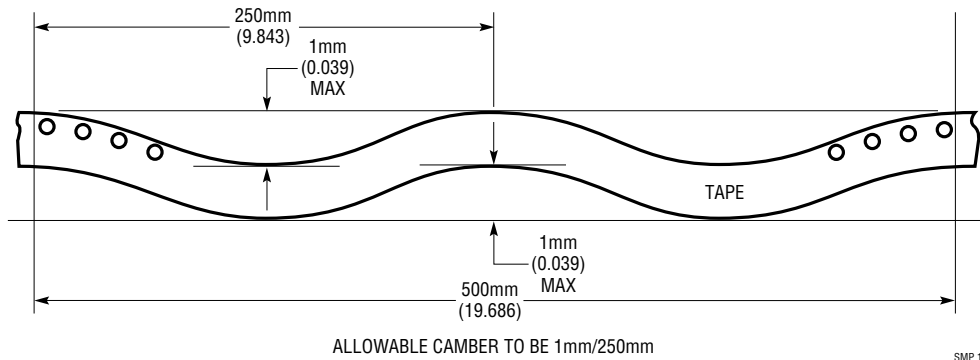


### Tape Leader (Start/End) Specification

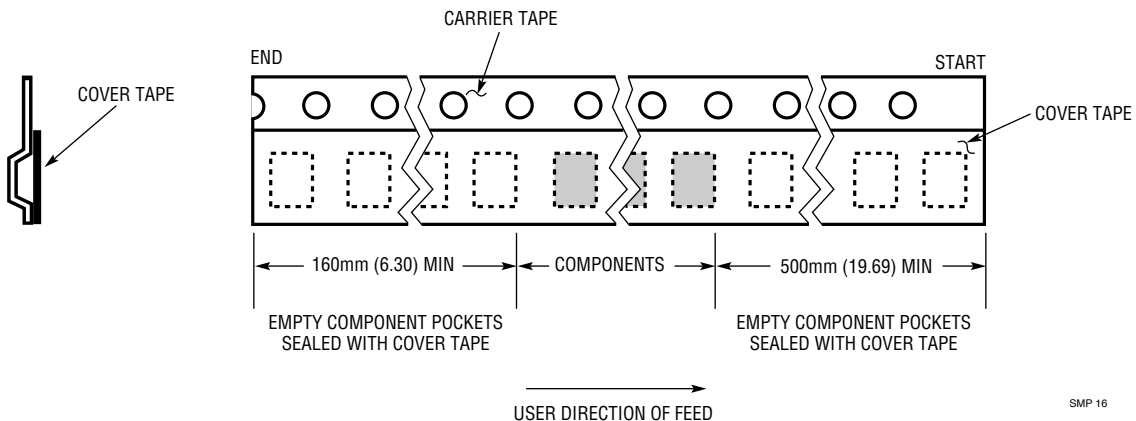


**TAPE AND REEL SPECIFICATIONS—SURFACE MOUNT**


**S3**  
**SOT-23 Devices**

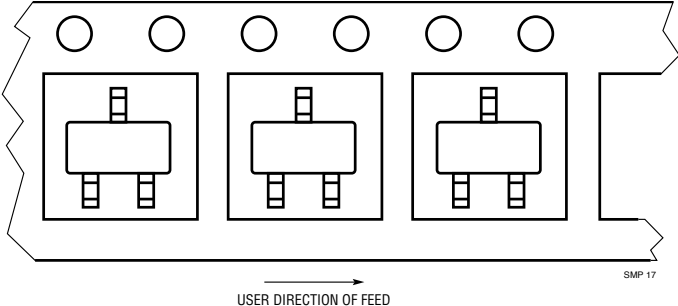

**S5**  
**TSOT, SOT-23 Devices**

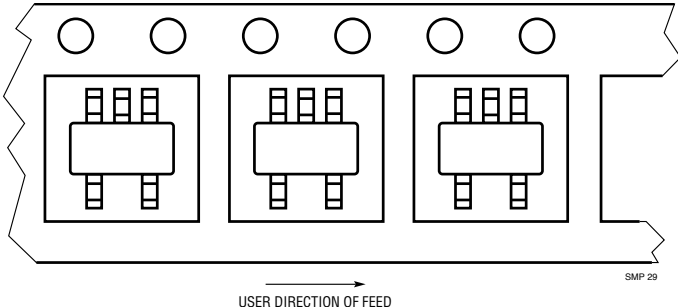


**SC6, S6 and TS8**  
**SC70, TSOT, SOT-23 Devices**

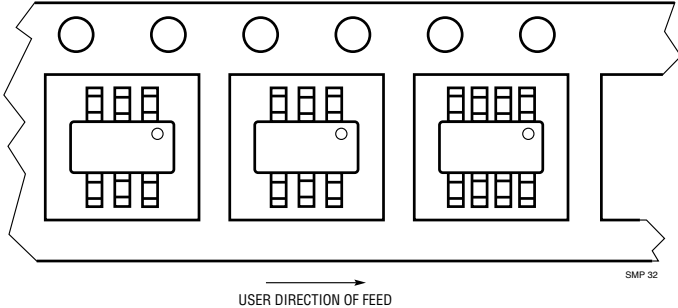

**TAPE AND REEL SPECIFICATIONS—SURFACE MOUNT**


ST  
SOT-223 Devices

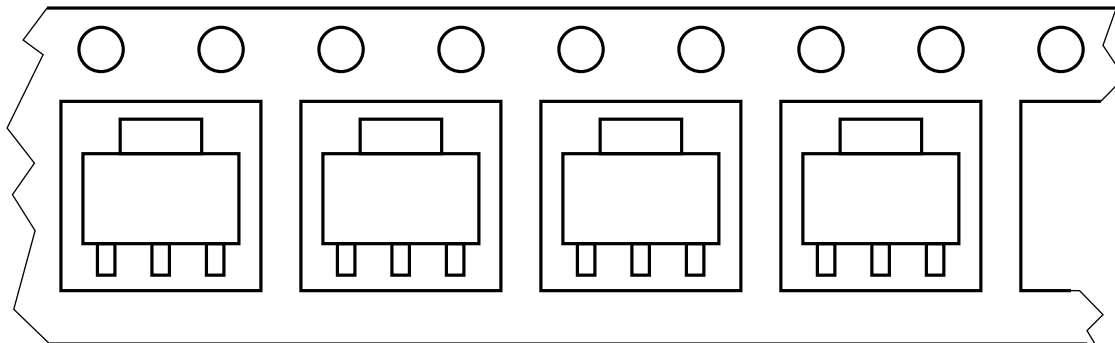

→  
USER DIRECTION OF FEED

SMP 17


M, Q, R  
DD Pak Devices

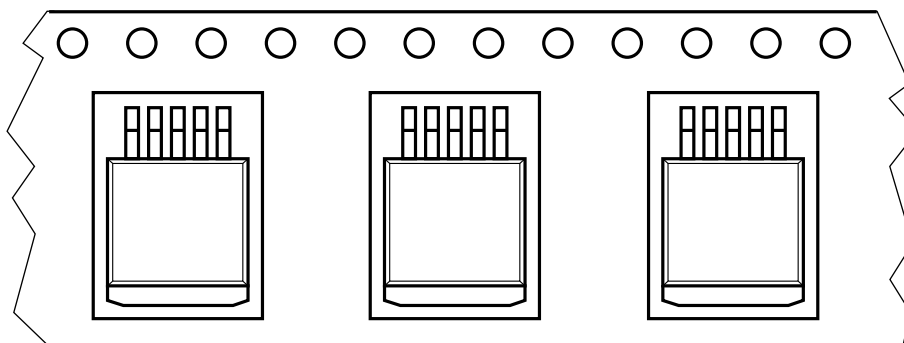

→  
USER DIRECTION OF FEED

SMP 18


DD, DE, F, FE, FW, G, GN, GW, S8, S, SW, MS8, MS, MS8E, MSE,  
SSOP, TSSOP, QFN, DFN, UTDFN and UTQFN Devices

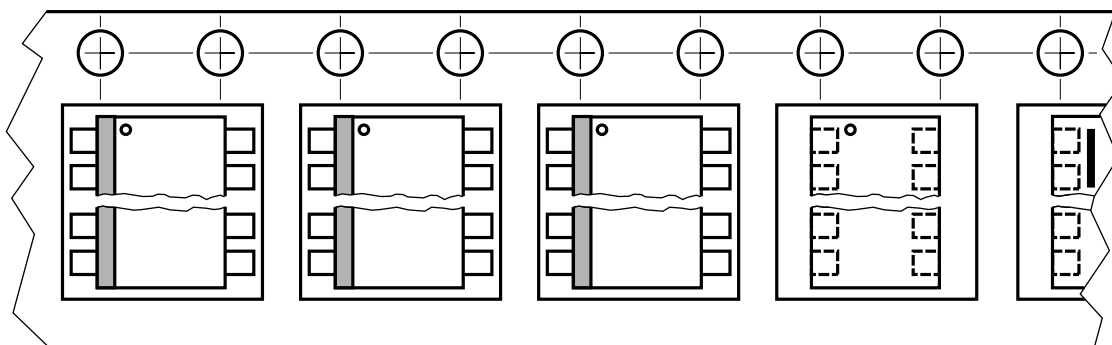

→  
USER DIRECTION OF FEED

SMP 19

**REEL DIMENSIONS—SURFACE MOUNT**

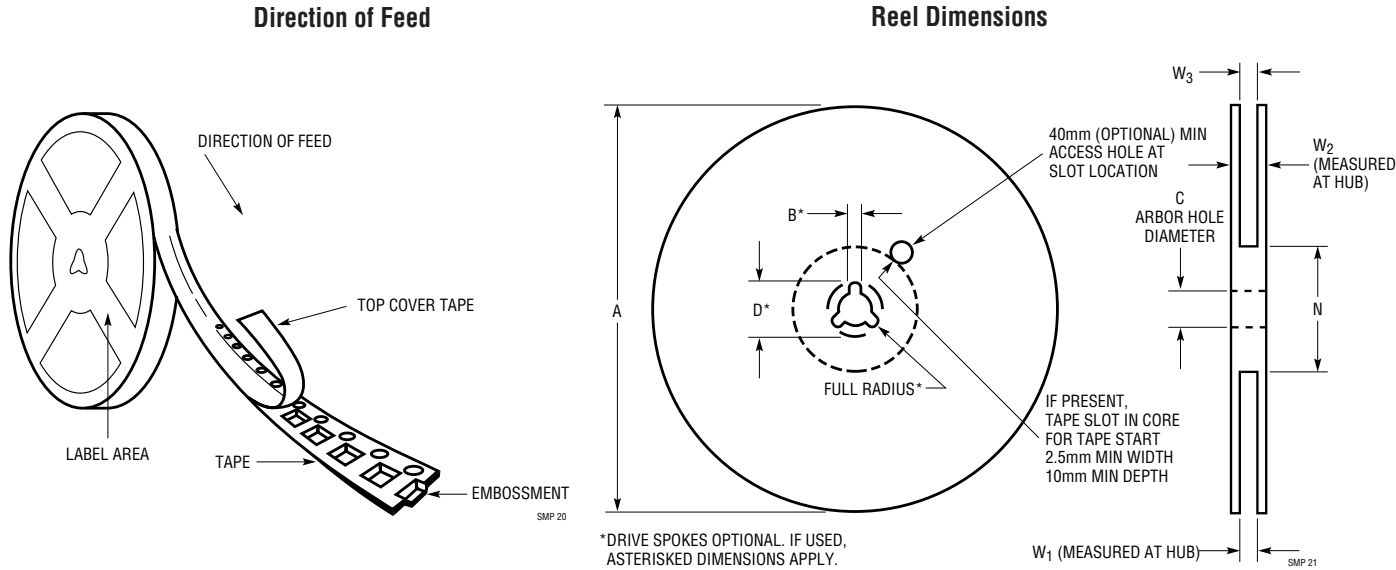


TAPE SIZE	A MAX	B MIN	C	D* MIN	N MIN	W <sub>1</sub>	W <sub>2</sub> MAX	W <sub>3</sub>
8mm	180	1.5	13.0 <sup>+0.5</sup> <sub>-0.2</sub>	20.2	60	8.4 <sup>+1.5</sup> <sub>-0.0</sub>	14.4	Shall Accommodate Tape Width Without Interference
8mm	330	1.5	13.0 <sup>+0.5</sup> <sub>-0.2</sub>	20.2	50	8.4 <sup>+1.5</sup> <sub>-0.0</sub>	14.4	
12mm	180	1.5	13.0 <sup>+0.5</sup> <sub>-0.2</sub>	20.2	60	12.4 <sup>+2.0</sup> <sub>-0.0</sub>	18.4	
12mm	330	1.5	13.0 <sup>+0.5</sup> <sub>-0.2</sub>	20.2	50	12.4 <sup>+2.0</sup> <sub>-0.0</sub>	18.4	
16mm	360	1.5	13.0 <sup>+0.5</sup> <sub>-0.2</sub>	20.2	50	16.4 <sup>+2.0</sup> <sub>-0.00</sub>	22.4	
24mm	360	1.5	13.0 <sup>+0.5</sup> <sub>-0.2</sub>	20.2	60	24.4 <sup>+2.0</sup> <sub>-0.00</sub>	30.4	

**Note 1:** All dimensions in millimeters.




# TAPE AND REEL SPECIFICATIONS—TO-92

Reel Pak Tape Orientation on Reel

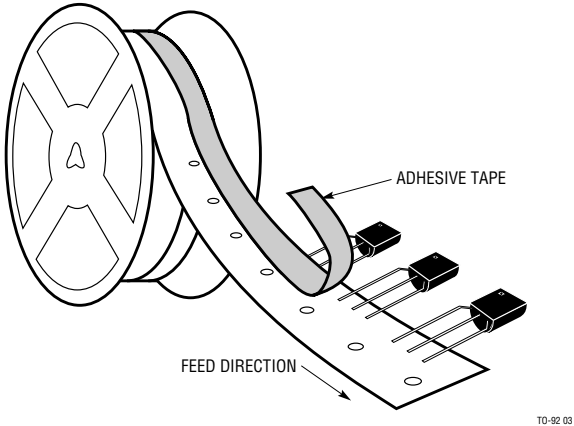


Ammo Pak Tape Orientation Inside Box

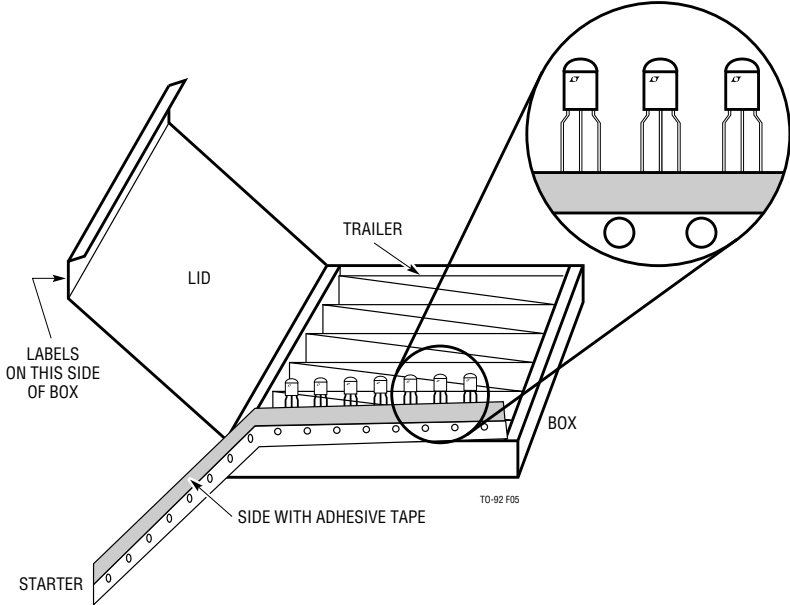

Package Orientation on Tape

**STYLE E: Standard Flow TR**  
(Flat Side of Package Faces Toward the Adhesive Tape)

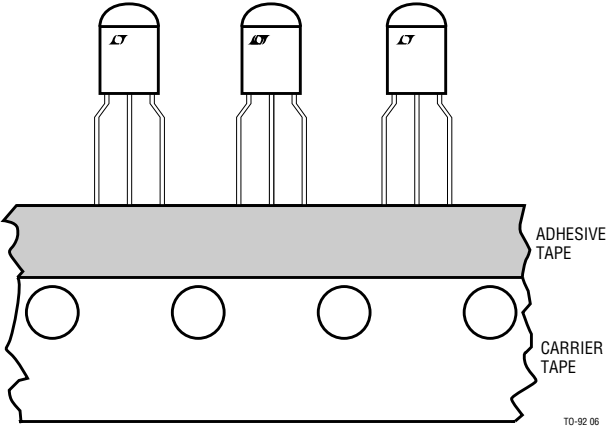

**STYLE A: Special Flow TRA**  
(Rounded Side of Package Faces Toward the Adhesive Tape)

